



# ProPlex™

# ETHERNET CABLES

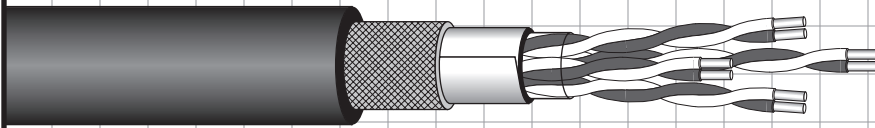

**PCCAT5EP**  
CAT5e SFTP Ethernet  
Patch Cable

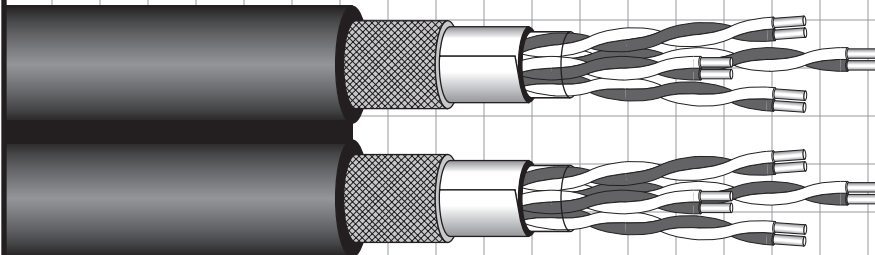

**PCCAT5EPX2**  
Dual CAT5e SFTP  
Figure Eight Cable



**PCCAT5EUTPP**  
CAT5e Ultra-Patch UTP  
Ethernet Cable


## THE WORLD'S MOST DURABLE ETHERNET CABLES

Finally! Ethernet patch cables designed to withstand the extreme conditions of the real world. Available as fully assembled patch cables, in standard and custom lengths, with your choice of four heavy-duty RJ-45 connectors. Panel-mount connectors also available for a complete OEM Ethernet wiring solution.


**RoHS**  
Compliant



**ProShell™**  
Durable RJ-45  
Backshell



**RJ Field™**  
Amphenol®



**RJLnxx™**  
RJLnxx Ethernet Connectivity  
Woodhead Connectivity  
SST • BNC • Hamson • MPM • RJLnxx



**EtherCon™**  
NEUTRIK  
CONNECTING THE WORLD

## General Information

<b>PCCAT5EP</b>	A 4 pair, 24 AWG, 100 Ohm SFTP round patch cable, designed to the ISO / IEC 11801 Category 5e requirements. The cable contains 4 twisted pairs, cabled, double shielded with kevlar reinforcement strands, jacketed in black UV resistant Polyurethane. Designed for fixed or portable applications in harsh environments.
CAT5E SFTP ETHERNET PATCH CABLE	
<b>PCCAT5EPX2</b>	Two PCCAT5EP cables extruded together like a zip cord. Eliminates the need for banding two ethernet cables together.
CAT5E SFTP FIGURE EIGHT CABLE	
<b>PCCAT5EUTPP</b>	A 4 pair, 24 AWG, 100 Ohm UTP round cable, designed to the IEC 61156-6 and TIA/EIA 568-B.2 CAT5 requirements. The cable contains 4 twisted pairs, cabled, assembled with kevlar reinforcement strands, jacketed in Black UV resistant Polyurethane.
CAT5E ULTRA-PATCH UTP ETHERNET CABLE	

## Attenuation db/100m nom.

	772 KHz	1 MHz	4 MHz	10 MHz	16 MHz	20 MHz	31.25 MHz	62.5 MHz	100 MHz
PCCAT5EP	2.7	3.15	6.45	9.9	12.3	13.8	17.7	25.6	33
PCCAT5EPX2	2.7	3.15	6.45	9.9	12.3	13.8	17.7	25.6	33
PCCAT5EUTPP		2.5	4.9	7.8	9.9	11.1	14.1	20.4	26.4

## N.E.X.T (Near-End Crosstalk Loss) db min.

	772 KHz	1 MHz	4 MHz	10 MHz	16 MHz	20 MHz	31.25 MHz	62.5 MHz	100 MHz
PCCAT5EP	64	62	53	47	44	42	40	35	32
PCCAT5EPX2	64	62	53	47	44	42	40	35	32
PCCAT5EUTPP		65	56	50	47	46	43	38	35

## Reeling Capability

In the core level, under the shields, are 4 pairs and 6 strength members, 3 white and 3 yellow. Two central strength members perform "tension relief" function. The other four are twisted around the pairs, each pair is wrapped in a strength member to perform "pair structure holding" function. The reason for two types of strength members; each one has a different prolongation constant, one positive, the other negative, so on average the length of the strength members is constant and equal to the wire length.

- To install this cable for reeling purposes the following guidelines are stated.
- Minimum reel core diameter is 10 cm.
  - Minimum tension used during reeling and un-reeling process.
  - Terminate the cable with plugs before reeling initiated.
  - Cable length per reel is less than 90 meter.

## General Specifications

	PCCAT5EP	PCCAT5EPX2	PCCAT5EUTPP
<b>Conductors</b>	24 AWG (0.25 mm <sup>2</sup> ) tinned copper, 7x0.20 mm		24 AWG (0.25 mm <sup>2</sup> ) tinned copper, 7x0.20 mm
<b>Insulation</b>	Color coded 568-B, Linear Low Density Polyethylene, Nom. Dia. 0.039" (1 mm)		Color coded 568-B, solid PO, Nom. Dia. 0.038" (0.97 mm)
<b>Assembly</b>	Pairs cabled with Kevlar strength members and separation tape wrapped.		
<b>Shields</b>	Inner: Aluminum mylar 100% coverage. Outer: tinned copper braid, 80%		None
<b>Jacket</b>	Black, special PUR compound.		Black, special PUR compound.
<b>Weight</b>	40 lbs. / mft (59 KG/Km)	73.9 lbs. / mft (110 KG/Km)	30 Lbs. / mft (44 KG/Km)
<b>Outside Diameter</b>	0.28" (7.1 mm) nom.	0.53" x 0.26" (13.5 x 6.5 mm) ± 0.15" (0.4 mm)	0.244" (6.2 mm) nom.
<b>Minimum Bend Radius During Installation</b>	67.5 mm (9 x O.D.)	45 mm	
<b>Minimum Bend Radius During Operation</b>	37.5 mm (5 x O.D.)	45 mm	
<b>Minimum Flexes to Failure</b>	Passes IEC 61156-6 requirements.		
<b>Temperature Rating</b>	Installation: -5 to +60 Deg. C Operational: -25 to +70 Deg. C		Installation: -5 to +60 Deg. C Operational: -25 to +70 Deg. C
<b>Compliance</b>	RoHS		

## Electrical Specifications

	PCCAT5EP	PCCAT5EPX2	PCCAT5EUTPP
<b>Voltage Rating</b>	230 VMS		230 VMS
<b>Spark Test (tested during production)</b>	3 KV		
<b>Velocity of Propagation</b>	67% nom.		68% nom.
<b>Impedance</b>	100 +/-15 Ohms 1-100 MHz		100 +/-15 Ohms 1-100 MHz
<b>Propogation Delay (100MHz)</b>	5.2 ns/m max. @ 100 MHz		570ns/100m max @ 1 MHz 545ns/100m max @ 10 MHz 537ns/100m max @ 100 MHz
<b>Delay Skew</b>	20 ns/100 m max. @ 1-100 MHz		35ns/100m max @ 1-100 MHz
<b>Dielectric Strength</b>	VAC/1min - 700V/min		VAC/1min - 700V/min
<b>Capacitance</b>	46 pF/m nom. @1 KHz		pair 46 pF/m
<b>LCL</b>	43 dB min. @ 64 KHz		
<b>Resistance Unbalance</b>	3% max @ 20 deg. C		2% max @ 20 degree C
<b>Capacitance Unbalance</b>	3.4 pF/m max. @1KHz (wire to ground)		3.2 pF/m max. @1KHz (wire to ground)
<b>Insulation Resistance</b>	150 M Ohm Min.		5000 M Ohm / Km Min.
<b>Return Loss (100 MHz)</b>	23 db/100m min @ 1-20 MHz		20 db/100 m min. @ 1 MHz 25 db/100 m min. @ 16 MHz 20.7 db/100 m min. @ 62.5 MHz 19 db/100 m min. @ 100 MHz
<b>DC Resistance</b>	96 Ohms/Km @ 20 deg. C		96 Ohms/Km @ 20 deg. C

# ProPlex™

## PUR JACKET PROPERTIES

### Jacket Compound Specification

Halogen Free Flame Retardant Polyether-based Polyurethane, Glossy finish.  
Excellent Hydrolysis resistance.  
High microbial resistance.  
UV resistant. High flexibility.

### Jacket Testing Results

Test	Test Method	Result
Density	DIN 53479	1.15g/cubic cm
Tensile strength	DIN 53504	40 nom. N/sqmm
Tensile strength after 42 days, H2O 80°C	DIN 53504	30 N/sqmm
Ultimate elongation	DIN 53504	550 nom. % min.
20% modulus	DIN 53504	3.2 N/sqmm
100% modulus	DIN 53504	5.5 N/sqmm
300% modulus	DIN 53504	12 N/sqmm
Tear strength	DIN 53515	60 N/mm
Hardness shore A	DIN 53505	87
Hardness shore D	DIN 53505	36
Melt index- MVR	ISO 1133	30-60 cubic cm/10 min
Brittle point	DIN 53513	minus 45°C
Abrasion Loss	DIN 53516	40 cubic mm
Compression set (23°C) 70h	DIN 53517	30%
Compression set (70°C) 24h	DIN 53517	50%

### PUR Jacket Chemical Resistance Chart - Organic Substances

Medium	Temperature	Concentration	Reaction
Acetic Acid	Room Temp	20%	slight
Acetone	Room Temp	40%	poor
Astm Fuel A	Room Temp	4%	nil
Astm Fuel B	Room Temp	10%	nil
Astm Fuel C	Room Temp	18%	nil to slight
Astm Oil 1	80°C		nil
Astm Oil 2	80°C	3%	nil
Astm Oil 3	80°C	6%	nil
Benzene	Room Temp		poor
Butanol	Room Temp		poor
Butyle Acetate	Room Temp	40%	poor
Citric Acid	Room Temp		slight
Cutting Oil	Room Temp		nil to slight
Cyclohexanol	Room Temp	5%	slight
Dibutylphthalate	Room Temp	40%	slight
Diesel Oil	Room Temp		nil to slight
Diesel Oil	Room Temp	5%	nil
Diethylether	Room Temp		nil to slight
Diethylprestone	Room Temp		nil to slight
Dimethylformamide	Room Temp		soluable
Ethyl Alcohol	Room Temp	100%	slight
Ethylacetate	Room Temp	40%	poor
Ethylether	Room Temp		slight
Glycerin	Room Temp		nil
Glycol	Room Temp	2%	nil
Glysantin / Water 1:1	Room Temp		slight
Glysantin / Water 1:1	80°C		slight
Hydraulic Oil	Room Temp		slight
Isopropanol	Room Temp	12%	slight
Isopropyl Alcohol	Room Temp	100%	slight
Kerosine	Room Temp	3%	nil
Machine Oil	Room Temp		nil to slight
Methanol	Room Temp	10%	slight
Methyl Alcohol	Room Temp	100%	slight
Methylen Chloride	Room Temp		no resistance
Methylethylketone	Room Temp	45%	poor
Mineral Oil	80°C		nil
Olive Oil	Room Temp		nil
Paraffin Oil	Room Temp		nil to slight
Siccinic Acid, Aqu.	Room Temp		nil to slight
Vegetable Oil And Fats	Room Temp	cold saturated	nil

### PUR Jacket Chemical Resistance Chart - Inorganic Substances

Medium	Temperature	Concentration	Reaction
Acetic Acid	Room Temp	20%	nil to slight
Acetic Acid 3N	Room Temp		poor
Aluminium Chloride, Aqu.	Room Temp	5%	nil
Ammonia, Aqu.	Room Temp	10%	nil
Aniline	Room Temp		no resistance
Barium Salts	Room Temp		nil to slight
Boric Acid	Room Temp	100%	nil to slight
Calcium Chloride	Room Temp	cold saturated	nil to slight
Calcium Nitrate	Room Temp	cold saturated	nil to slight
Chromium Salts, Aqu.	Room Temp	cold saturated	nil to slight
Copper Salts, Aqu.	Room Temp	cold saturated	nil to slight
Fe Chloride, Aqu. 5%	Room Temp	40°C	slight
Hydrochloric Acid 20%	Room Temp	20%	nil to slight
Hydrogen Peroxide	Room Temp	3%	nil to slight
Hydrogen Sulphide	Room Temp		nil to slight
Magnesium Salts, Aqu.	Room Temp	cold saturated	nil to slight
Mercury	Room Temp	100%	nil to slight
Mercury Salts, Aqu.	Room Temp	cold saturated	nil to slight
Nickel Salts, Aqu.	Room Temp	cold saturated	nil to slight
Nitric Acid	Room Temp	20%	no resistance
Phosphoric Acid	Room Temp	50%	nil to slight
Potassium Carbonate, Aqu. (Potash)	Room Temp		nil to slight
Potassium Chloride	Room Temp	cold saturated	nil to slight
Potassium Dichromate, Aqu.	Room Temp		slight
Potassium Iodide	Room Temp		nil to slight
Potassium Nitrate, Aqu.	Room Temp		nil to slight
Potassium Permanganate	Room Temp		nil to slight
Potassium Sulphate, Aqu.	Room Temp		nil to slight
Sea Water	Room Temp	100%	nil
Silver Salts, Aqu.	Room Temp		nil to slight
Sodium Bicarbonate, Aqu. (Soda)	Room Temp		slight
Sodium Chloride, Aqu.	Room Temp		nil to slight
Sodium Chloride Solution, Conc.	Room Temp		nil
Sodium Hydroxide Solution 1N	Room Temp		slight
Sodium Thiosulphate, Aqu.	Room Temp	100%	nil to slight
Sulphur	Room Temp		slight
Sulphur Dioxide	Room Temp	100%	slight
Sulphuric Acid 20%	Room Temp		slight
Toluene	Room Temp	35%	poor
Water	100°C		poor
Water	Room Temp		poor
Water	80°C		nil to slight

Key: Nil: Resistance over a prolonged period.  
Nil to slight: After a certain time appreciable differences are noticable.  
Slight: Conditionally resistant.  
Poor: Short term contact possible under certain conditions.  
No resistance: Pronounced attack.

LITPPXCATSE-010311



### LOS ANGELES

10643 Glenoaks Blvd.  
Pacoima, CA 91331  
USA

Tel: +1 818.899.8818  
Fax: +1 818.899.8813

### LONDON

21 Armstrong Way  
Southall  
UB2 4SD England

Tel: +44 (0)20.8574.9700  
Fax: +44 (0)20.8574.9701

### NEW YORK

100 Asia Place  
Carlstadt, NJ 07072  
USA

Tel: +1 201.896.8600  
Fax: +1 201.896.8601

### BEIJING

No. 309, Building 6  
Sanlitun Nanlu  
Chaoyang District  
Beijing, China 100027

Tel: +86 10.8492.1587  
Fax: +86 10.8492.7635

### TORONTO

409 Saddler St. West  
Box 654, Durham  
Ontario NOG-1R0

Tel: +1 519.369.9990  
Fax: +1 519.369.9992